Royal College of Physicians

Setting higher medical standards

London, UK

Connections

C1: 2" PVC spigot (Fill point)
C2: 4" PN16 flange c/w internal perforated pipe*
C3: 4" PN16 flange c/w internal perforated pipe*
C4: 4" PN16 flange c/w internal plain/perforated pipe*
C5: 4" PN16 flange c/w internal plain/perforated pipe*
C6: 2" PN16 flange (Drain)
C7: 4" PN16 flange c/w internal perforated pipe*
C8: 4" PN16 flange c/w internal perforated pipe*
C9: 4" PN16 flange c/w internal plain/perforated pipe*
C10: 4" PN16 flange c/w internal plain/perforated pipe*
C11: 2" PN16 flange (Drain c/w extended internal pipework)

Site Built Internally Flanged Rectangular Insulated Tank

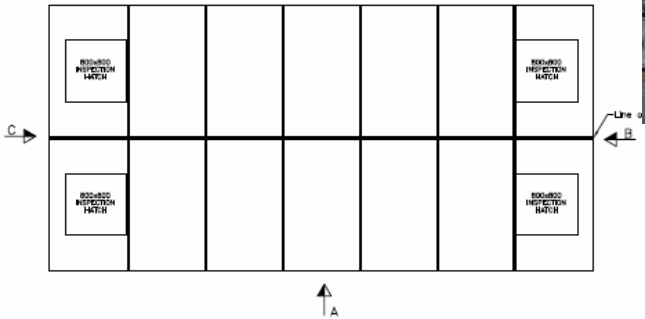

40 m3 PCM Tank
S10 (+10C/50F)
2,000 kWh
(568 RT-h)

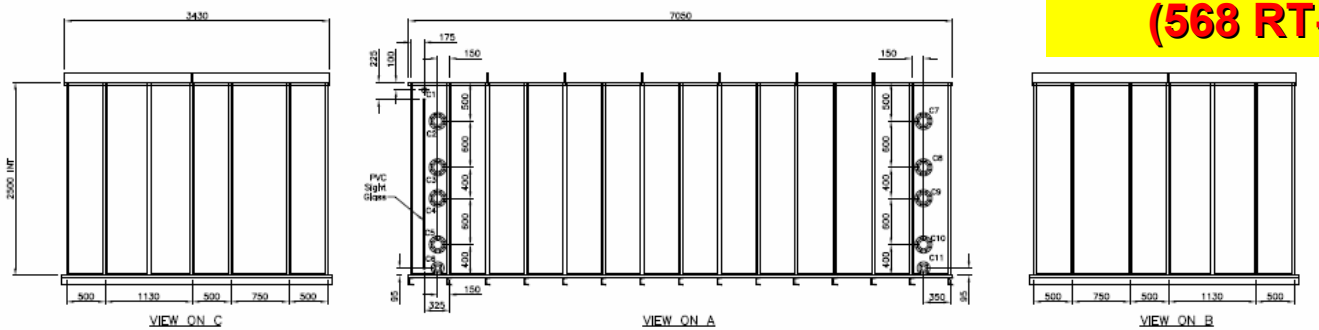

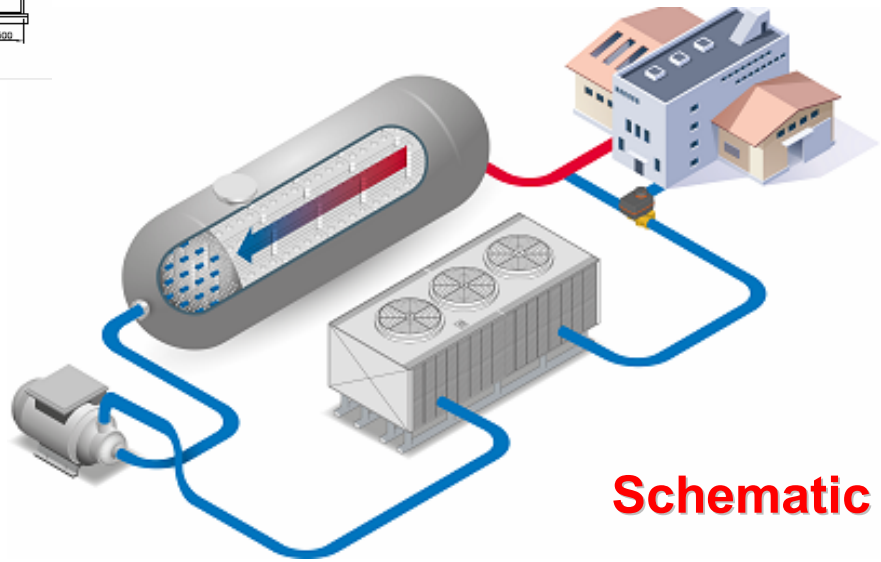

Schematic